


## Outdoor Series

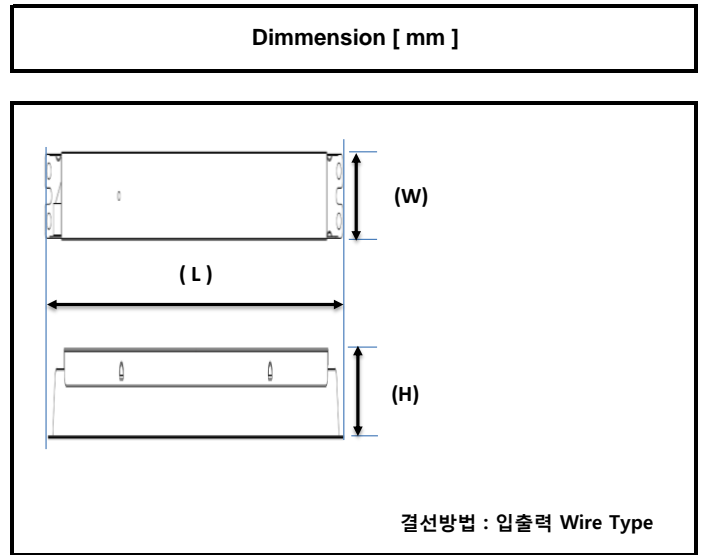

DESCRIPTION		ASSR	AMQR
Circuit Type		Secondary Side Regulation Type	Quasi-Resonant Circuit Type
Feature		Standard	Standard
Dimmension [ mm ] L x W x H		169 x 67 x 40 ( Hole : 158 )	215 x 67 x 46 ( Hole : 200 )
Input	Voltage (입력전압)	198 ~ 242 VAC	
	Frequency (주파수)	60Hz ± 3Hz	
	Power Factor (역률)	$\lambda > 0.9$	
	Efficiency (효율)	85%	
Output	DC Voltage (출력전압)	24Vdc ~ 48Vdc	
	Rated Current (출력전류)	Min 530mA ~ Max 2830mA	Min 1300mA ~ Max 3750mA
	Rated Power (출력전력)	Min 30W ~ Max 80W	Min 50W ~ Max 150W
	Output Method (출력방식)	Constant Current Type	
Protection	Over Load (과부하)	Protection Type : Shut Down operation Voltage, Restart	
	Over Voltage (과전압)	Protection Type : Shut Down operation Voltage, Restart	
Environment	Operating Temperature (사용온도)	-20°C ~ 50°C	
	Storage Temp & Humidity (보관조건)	-20°C ~ 70°C / 10 ~ 100%RH	
Safety & EMI	Safety Standards	KS C 7655, 10-IS 0256	
	EMI	Compliance to KSC IEC 61000, Class B	

\* 상세사항은 당사 영업부에 문의 바랍니다.