


ST Series

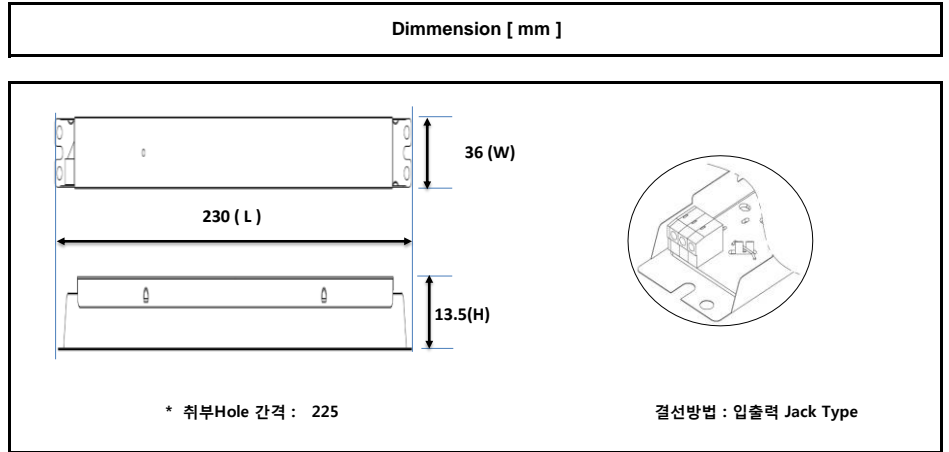

DESCRIPTION		STPF	STPR	STSR	STSF	STFF	STDD	
Circuit Type		Primary Side Regulation Type			Secondary Side Regulation Type		Power Factor Correction Primary Side Regulation Type	2 Stage Dimming Type
Feature		Flicker Free	Standard	DC Sensor	DC Sensor Flicker Free	Flicker Free	Standard	
Input	Voltage (입력전압)	198 ~ 242 VAC						
	Frequency (주파수)	60Hz ± 3Hz						
	Power Factor (역률)	$\lambda > 0.9$						
	Efficiency (효율)	85%						
Output	DC Voltage (출력전압)	24Vdc ~ 48Vdc						
	Rated Current (출력전류)	Min 530mA ~ Max 2300mA	Min 530mA ~ Max 2300mA	Min 530mA ~ Max 2300mA	Min 530mA ~ Max 2130mA	Min 530mA ~ Max 2300mA	Min 530mA ~ Max 2300mA	
	Rated Power (출력전력)	Min 25.5W ~ Max 55.5W	Min 25.5W ~ Max 55.5W	Min 25.5W ~ Max 55.5W	Min 25.5W ~ Max 51W	Min 25.5W ~ Max 55.5W	Min 25.5W ~ Max 55.5W	
	Output Method (출력방식)	Constant Current Type						
Protection	Over Load (과부하)	Protection Type : Shut Down operation Voltage, Restart						
	Over Voltage (과전압)	Protection Type : Shut Down operation Voltage, Restart						
Environment	Operating Temperature (사용온도)	-20°C ~ 50°C						
	Storage Temp & Humidity (보관조건)	-20°C ~ 70°C / 10 ~ 90%RH						
Safety & EMI	Safety Standards	KS C 7655, 10-IS 0256						
	EMI	Compliance to KSC IEC 61000, Class B						

* 상세사항은 당사 영업부예 문의 바랍니다.